



The fitting of the appliance should only be carried out by a authorised person/licensed gasfitter. Please read the safety regulations. See the data plate for information regarding the total gas consumption, gas type and gas pressure.

Preparations for installation

Pictograms used



Important information



Gas connection




Electrical connection



Free space around appliance
Rangehoods and exhaust fans shall be installed in accordance with manufacturers instructions.

For an overhead exhaust fan A>750 mm!

	A (mm)	B (mm)	C (mm)	D (mm)
HG16	min. 650	min. 600	min. 450	min. 120
HG17	min. 650	min. 750	min. 450	min. 120
HG19	min. 650	min. 900	min. 450	min. 120

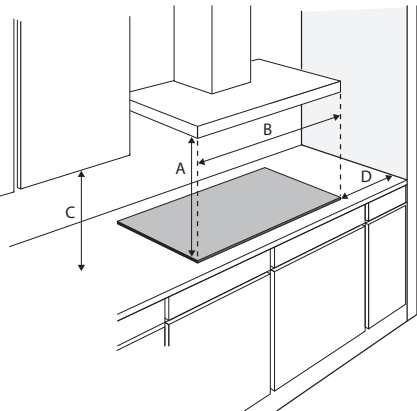

1/2" ISO 228 / 1/2" ISO 7-1



The gas connection must comply with national and local regulations.

The hotplate can be connected with rigid pipe as specified in AS/NZS 5601.1 current edition.


When the appliance is connected with a hose assembly, the supply point shall be accessible with the appliance installed.

220-240 V - 50/60 Hz - max. 1 W




This appliance must be earthed


The electrical connection must comply with national and local regulations.

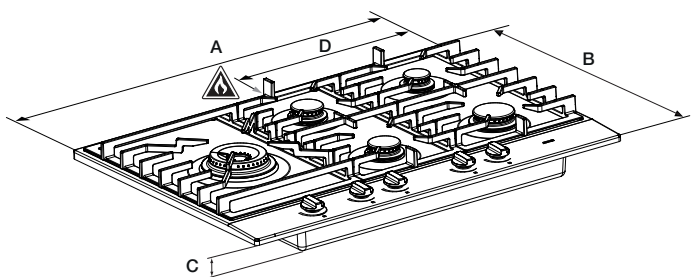

	A (mm)	B (mm)	C (mm)	D (mm)
HG16	600	526	48	520
HG17	750	526	48	594
HG19	900	526	48	514

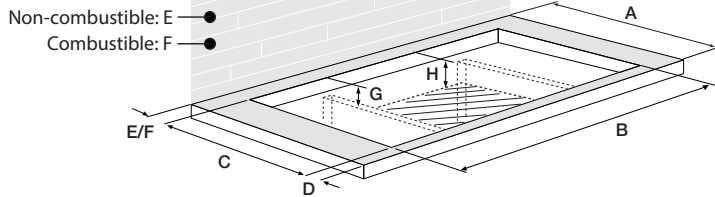

	A (>mm)	B (mm)	C (mm)	D (>mm)	E (>mm)	F (>mm)	G	H
HG16	600	560	490	60	50	125	55	100
HG17	600	560	490	60	50	125	55	100
HG19	600	860	490	60	50	125	55	100

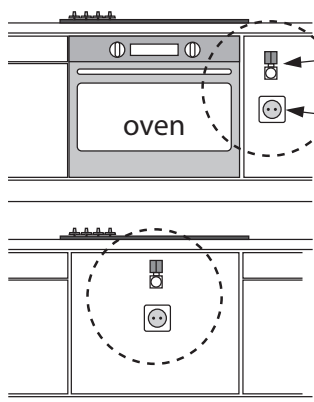


Accessibility!



y >60° C

x <60° C

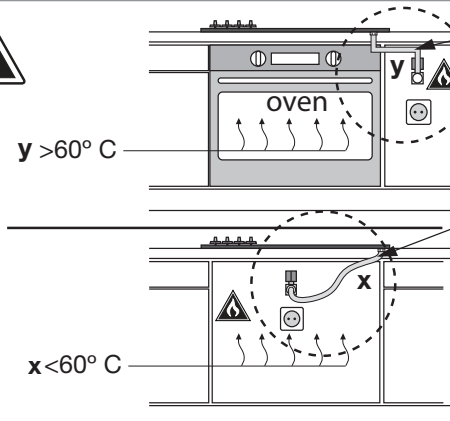


Y:
metal
Gas supply valve
shall be accessible


X:
safety hose
Gas supply valve
shall be accessible

Placing sealing tape



For stainless steel drip tray

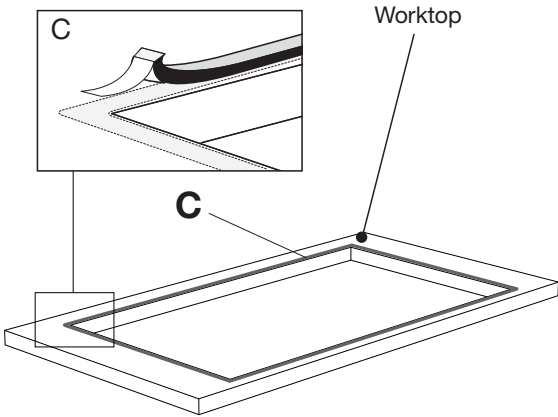


Gas connection

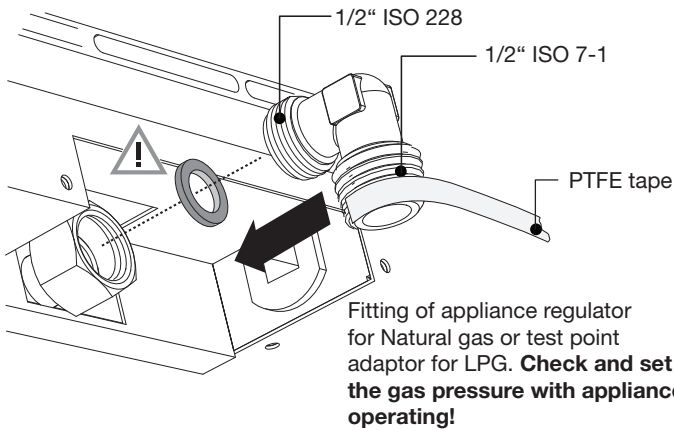

Building in

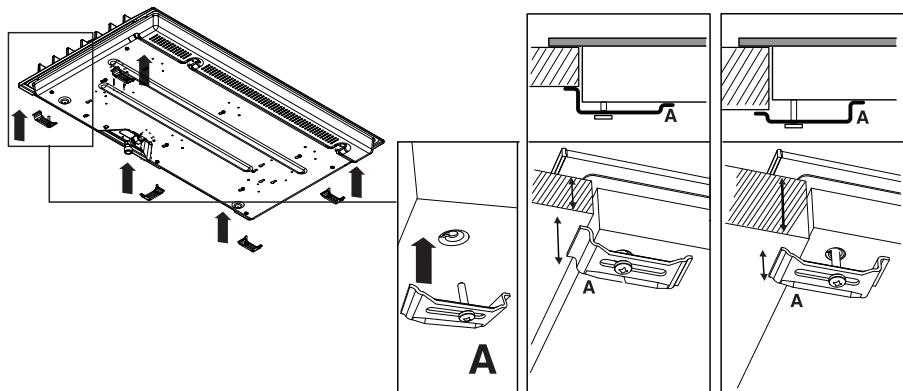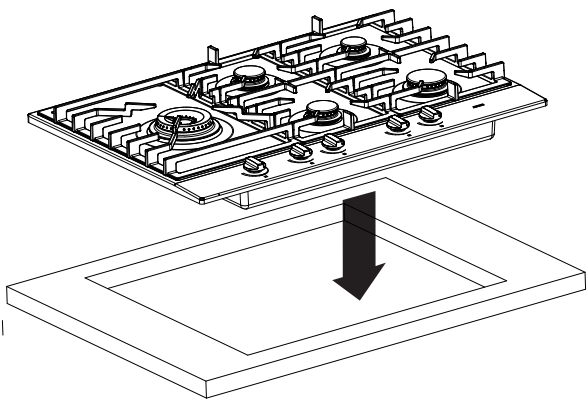

Connecting and testing

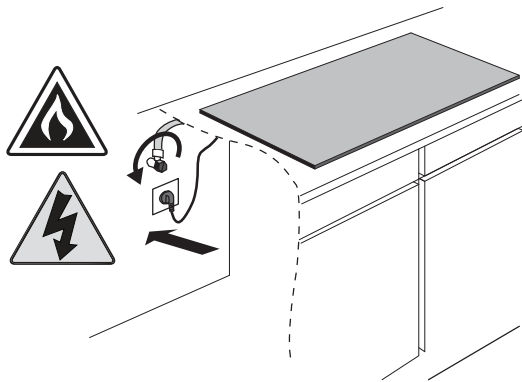

Check that the connections are gastight.
Test the working of the appliance!
Check the ignition of all burners individually and combined.



	Small	Medium	Large	Wok
HG16	1	2	-	1
HG17	1	2	1	1
HG19	1	2	1	1

Gas	Burner	Injector burner (mm)	Adj. Screw (mm)	Burner rate (MJ/h)	Gas pressure (kPa)
Natural gas (NG)	Small	0.90	0.45	4.00	1.0
	Medium	1.17	0.60	6.70	
	Large	1.31	0.65	8.60	
	Wok	1.70 + 0.66	0.60	15.70	
ULPG	Small	0.46	0.26	2.60	2.75
	Medium	0.60	0.30	4.90	
	Large	0.72	0.36	7.10	
	Wok	0.93 + 0.40	0.40	13.60	